



LED Explosion Proof Light

**ATEX & IECEx Certified LED Floodlight/High bay light in Hazardous Area.
Polarbear Series**

II 3 G Ex nR IICT* Gc

II 3 D Ex tc IIIC T* Dc IP66





Features And Benefits:

- High efficacy LED Source with long lifespan >50,000 hours
- 5-year performance warranty
- Low THD around 10%, Less interference
- 5KV Surge Protection
- Robust aluminium housing and strong tempered glass
- Vibration and shock resistant
- Low maintenance

Applications:



Oil&Gas Exploration



Drilling



Oil Refinery



Petrochemical Plant



Power Plant



Pharmaceutical Plant



ATEX & IECEx Certified LED Floodlight/High bay light in Hazardous Area.

LED Floodlight/High bay light

Standard & Certificate:

Ex Mark:	Gas: ⚠ II 3 G Ex nR IICT* Gc Dust: ⚠ II 3 D Ex tc IICT* Dc IP66		
Certificate:	• ATEX Certification NO.: LCIE 14 ATEX 1014X • IECEx Certification NO.: IECEx CQM 13.0044X	• CE • RoHS	• ABS
Executive Standard:	• IEC 60079-0:2011 • IEC 60079-15:2010 • IEC 60079-31:2008 • EN 60598-2-5:1998 • EN 60598-1:2008 +A11:2009 • EPA3050B:1996 • EN1122B:2001	• EN 60079-0:2012 • EN 60079-15:2010 • EN 60079-31:2009 • EN 55015:2006 +A1:2007+A2:2009 • EN 61547:2009 • EN 61000-3-2:2006 +A1:2009+A2:2009 • EN 61000-3-3:2008	• EPA3052:1996 • EPA3060A:1996 • EPA7196A:1992 • EPA3540C:1996 • EPA8270D:2007 • IEC 62321:2008
Classification:	• Group II Zone 2 & 22		

Electrical & Photometric Features:

Luminaire Efficacy:	150 lm/W
Lifespan:	>50,000 hours
Operating Voltage:	100-277 VAC/220-240 VAC/100-130 VAC 141-392 VDC/311-339 VDC/141-184 VDC
Power:	80W/120W/160W/200W/240W
Frequency:	50/60Hz
Power Factor:	>0.98
THD:	<10%
Insulation Class:	I
Surge Protection:	5KV
LED Driver:	Over voltage protection/short circuit protection


Mechanical Features:

Weight:	7.3Kg(80W)/11Kg(120W,160W)/18.4Kg(200W,240W)
Size:	210*400*161mm(80W)/260*400*161mm(120W,160W) 500*400*161mm(200W,240W)
Ambient Temperature:	-40℃-+55℃
Connecting Terminals:	3*1.0-4mm ² (L+N+PE)
Available cable outer diameter:	φ7-φ14(mm)
Cable Entries:	2XNPT 3/4" (M20*1.5, M25*1.5 are optional)
Earthing Protection:	M4 (Internal & external earth bolts)
IP Code:	IP66
Enclosure Material:	Copper-free Aluminium
Enclosure Colour:	Orange,RAL2011(optional grey RAL7040)
Coating:	Epoxy powder coating
Exposed Fastener:	Stainless steel
Protective Cover:	Tempered glass,Stand 7J impact



ATEX & IECEx Certified LED Floodlight/High bay light in Hazardous Area.

Production Definition

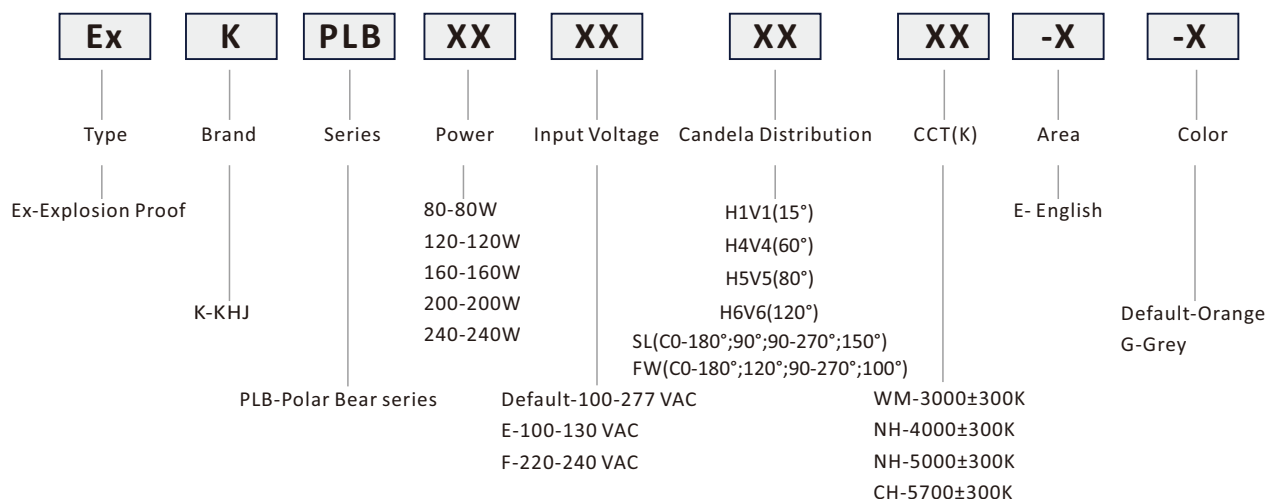


Ordering information


P/N	Operating Voltage(V)	Luminous Flux(lm)	Power(W)	CRI	Color Temp.	CCT(K)	Temp. Classification
Ex-KPLB80*WM-E	100-277 AC (141-392 DC)	10920	80	70	Warm white	3000±300	T6/T5
Ex-KPLB80*NH-E		12000	80	70	Natural white	4000±300	T6/T5
Ex-KPLB80*NH-E		12000	80	70	Natural white	5000±300	T6/T5
Ex-KPLB80*CH-E		12000	80	70	Cool white	5700±300	T6/T5
Ex-KPLB120*WM-E		16380	120	70	Warm white	3000±300	T6/T5
Ex-KPLB120*NH-E		18000	120	70	Natural white	4000±300	T6/T5
Ex-KPLB120*NH-E		18000	120	70	Natural white	5000±300	T6/T5
Ex-KPLB120*CH-E		18000	120	70	Cool white	5700±300	T6/T5
Ex-KPLB160*WM-E		21840	160	70	Warm white	3000±300	T6/T5
Ex-KPLB160*NH-E		24000	160	70	Natural white	4000±300	T6/T5
Ex-KPLB160*NH-E		24000	160	70	Natural white	5000±300	T6/T5
Ex-KPLB160*CH-E		24000	160	70	Cool white	5700±300	T6/T5
Ex-KPLB200*WM-E		27300	200	70	Warm white	3000±300	T6/T5
Ex-KPLB200*NH-E		30000	200	70	Natural white	4000±300	T6/T5
Ex-KPLB200*NH-E		30000	200	70	Natural white	5000±300	T6/T5
Ex-KPLB200*CH-E		30000	200	70	Cool white	5700±300	T6/T5
Ex-KPLB240*WM-E		32760	240	70	Warm white	3000±300	T5/T4
Ex-KPLB240*NH-E		36000	240	70	Natural white	5000±300	T5/T4
Ex-KPLB240*NH-E		36000	240	70	Natural white	4000±300	T5/T4
Ex-KPLB240*CH-E		36000	240	70	Cool white	5700±300	T5/T4

Remarks: 1.* Stands for beam angle,including H1V1 / H4V4 / H5V5 / H6V6 / SL/FW;
2.For Beam angle H1V1,H4V4 and H5V5,the luminous flux will be 15% less;
For Beam angle SL/FW,the luminous flux will be 30% less.
3.SL beam angle is only applicable for 80W&120W.



Candela Distribution

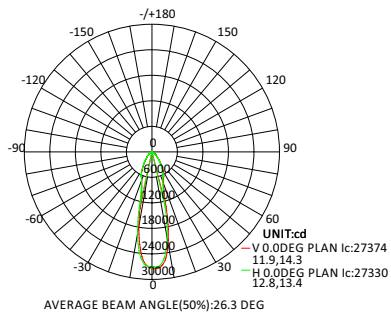


H1V1(15°)/High efficacy LED Source

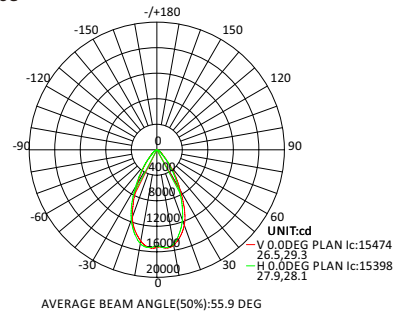



H4V4(60°)/High efficacy LED Source

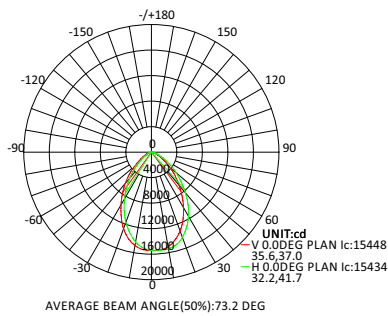


H5V5(80°)/High efficacy LED Source

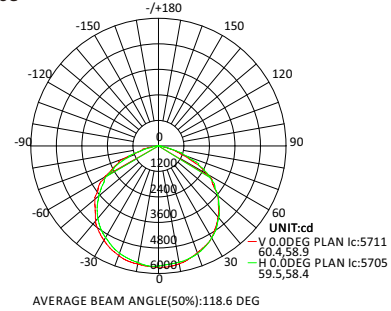

H6V6(120°)/High efficacy LED Source

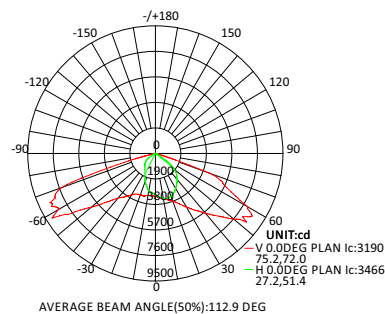

SL/High efficacy LED Source

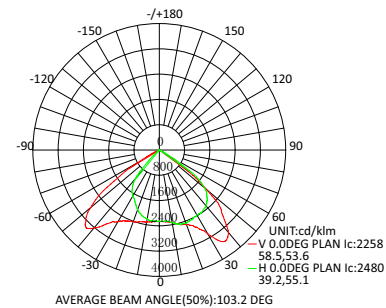


FW/High efficacy LED Source




Installation Method


Stanchion Mount:

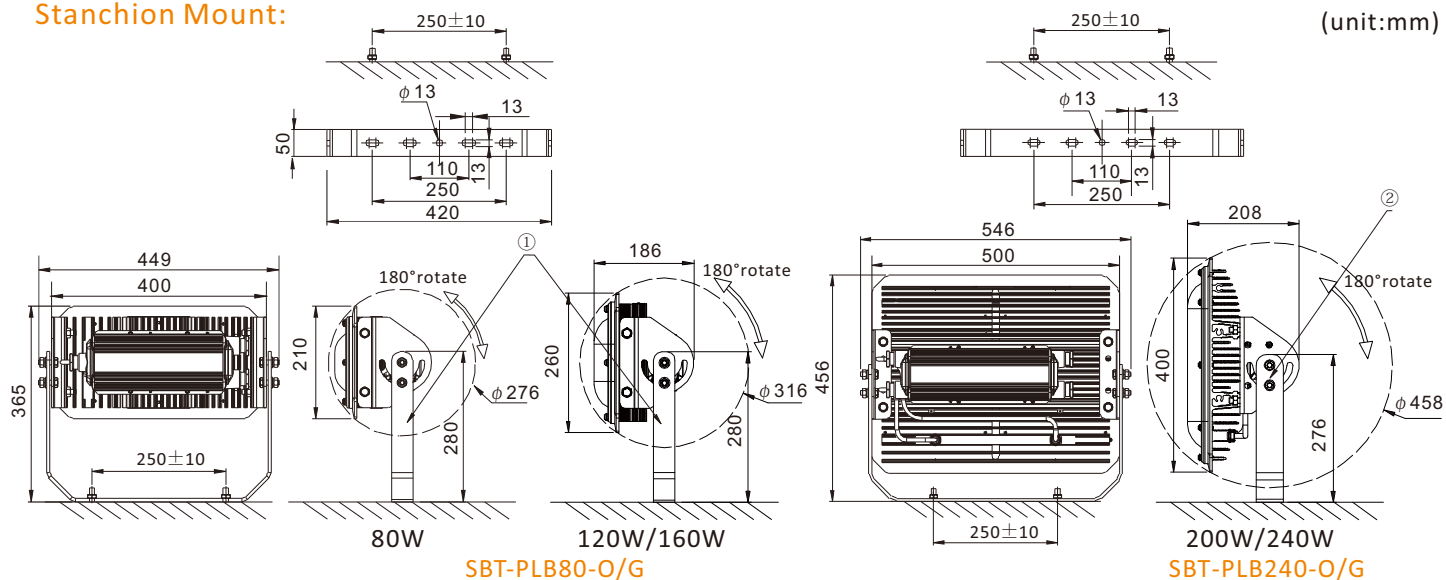

Pole Mount:

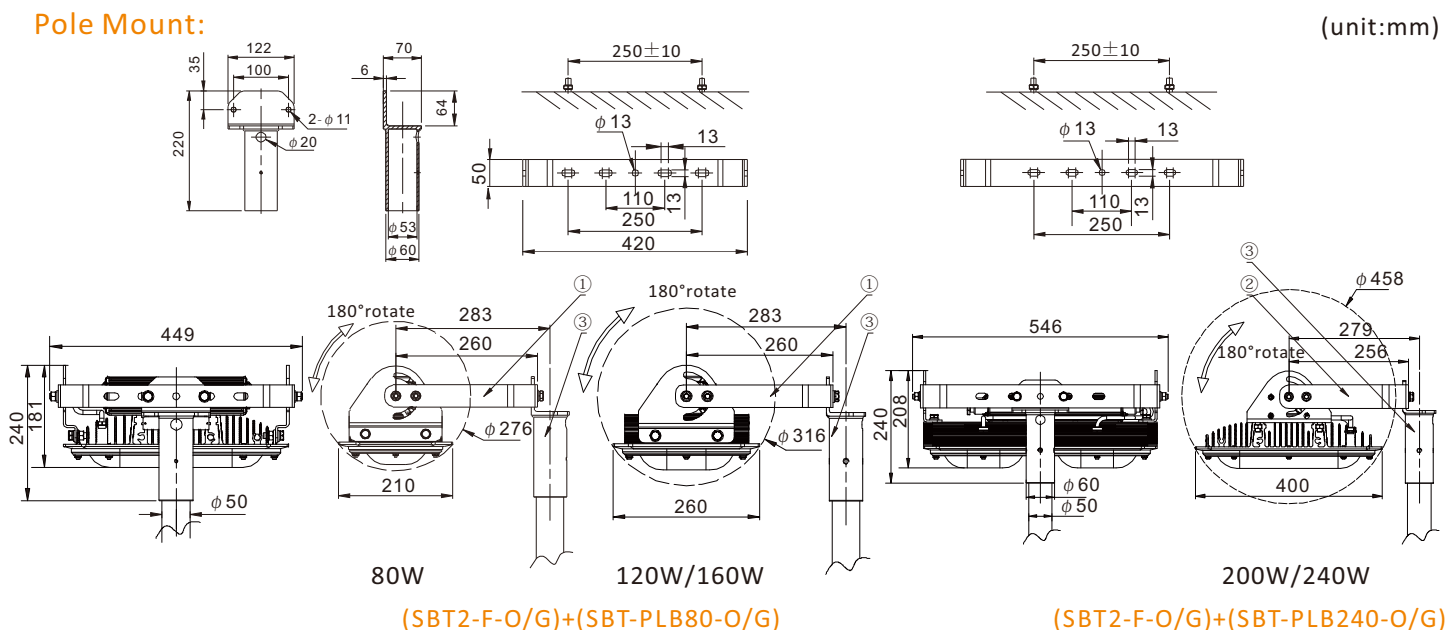


Buckle Mount:

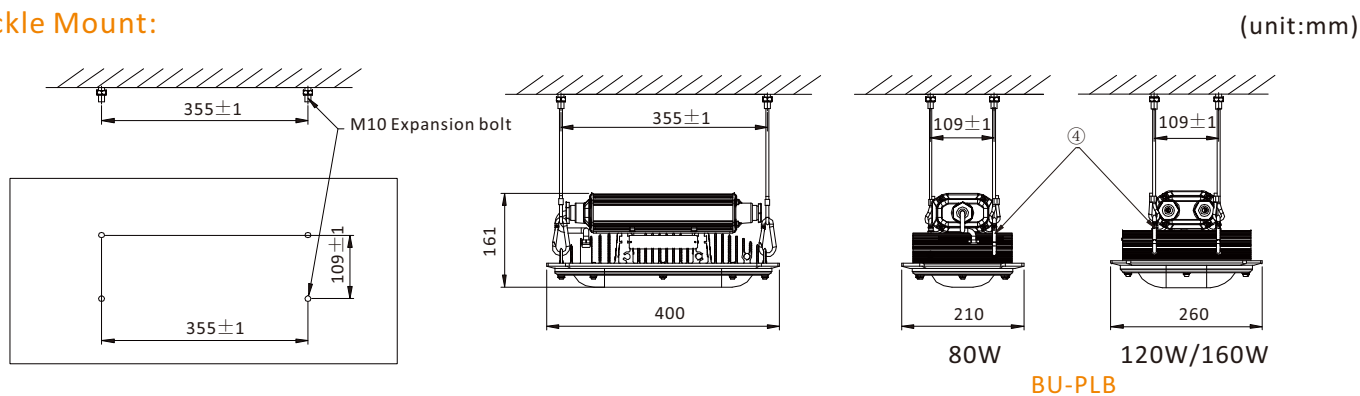

Installation Method

Pendant Mount:


(unit:mm)

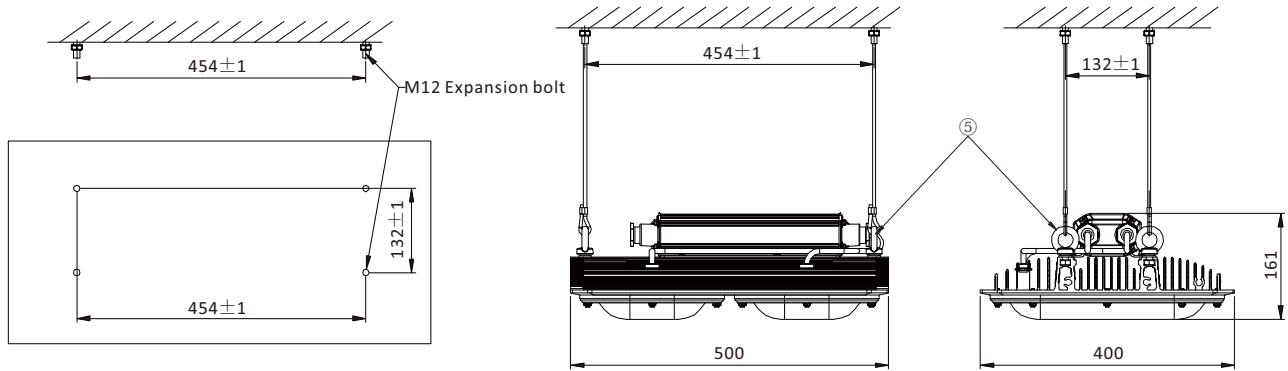

LO-PLB

Pipe Clamp:

(unit:mm)



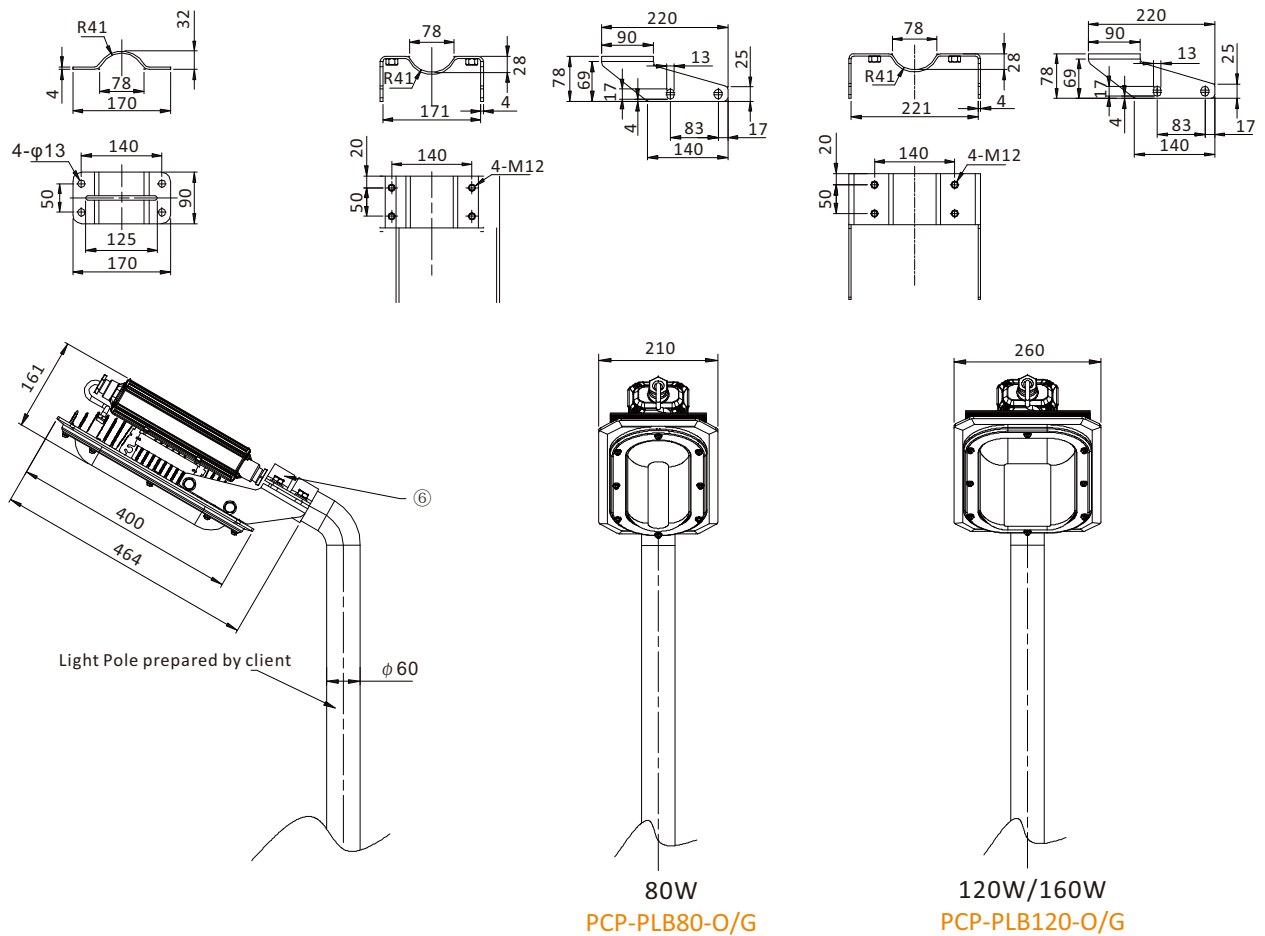


80W
PCP-PLB80-O/G

120W/160W
PCP-PLB120-O/G

ATEX & IECEx Certified LED Floodlight/High bay light in Hazardous Area.

Optional Parts

No.	Installation accessories	Part No.	Picture	Material	Weight(Kg)	QTY	Remark
1	Pipe clamp	PCP-PLB80-O/G		Q235	2.1	1	Pipe clamp (80W)
2	Pipe clamp	PCP-PLB120-O/G		Q235	2.3	1	Pipe clamp (120W/160W)
3	Buckle	BU-PLB		45#	0.1	4	Buckle mount (80W/120W/160W)
4	Loop	LO-PLB		45#	0.2	4	Pendant mount (200W/240W)
5	Stanchion Bracket	SBT-PLB80-O/G		Q235	4	1	Wall mount Stanchion mount (80W/120W/160W)
6	Stanchion Bracket	SBT-PLB240-O/G		Q235	4.3	1	Wall mount Stanchion mount (200W/240W)
7	Stanchion Bracket1	SBT2-F-O/G SBT-PLB80-O/G		Q235	5.63	1	Pole mount (80W/120W/160W)
8	Stanchion Bracket1	SBT2-F-O/G SBT-PLB240-O/G		Q235	5.83	1	Pole mount (200W/240W)
9	Guard-1	GU-PLB80-MC		SUS304	0.3	1	(80W)
10	Guard-2	GU-PLB120-MC		SUS304	0.35	1	(120W/160W)
		GU-PLB240-MC			0.7	1	(200W/240W)